


Delta SubSea

GR29 Underwater Hydraulic Grinder

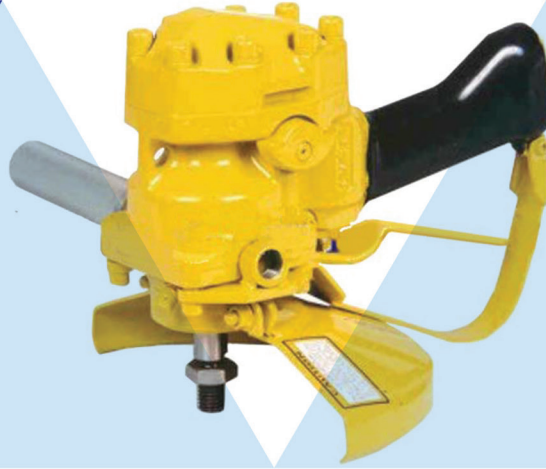

DSS's Stanley Underwater Hydraulic Grinder GR29 can be used by commercial divers and ROVs for underwater grinding and cleaning with either cup or standard grinding wheels, wire or nylon brushes.

The integral Stanley Hyrevz gear motor is manufactured to exacting standards to deliver maximum efficiency for the Stanley Hydraulics Underwater Grinder GR29. The plastisol covering the handle transmits very little heat. The plastisol gives a more comfortable grip to the Stanley Hydraulic Underwater GR29. There are two positions available for the assist handle to be conveniently placed by the commercial diver or project manager. Either position is at a most comfortable handling position from the valve handle.

Features

Pressure:

- ▲ 1000-2500 psi / 70 - 175 bar

Flow Range:

- ▲ 4 - 12 gpm / 15 - 35 lpm

Optimum Flow:

- ▲ 2700 rpm at 10 gpm / 38 lpm

Porting:

- ▲ -8 SAE O-Ring

Connect Size and Type:

- ▲ (2) 3/8 in. NPT Adapters

Motor:

- ▲ Integral

Specifications

Capacity:

- ▲ 9 in / 23cm Wheel on 5/8in -11 THD

Weight:

- ▲ 15lbs / 6387kg

Length:

- ▲ 9in / 23cm

Width:

- ▲ 4 1/2in / 11.5cm

Delta SubSea

DeltaSubSea-ROV.com

1.936.582.7237