




Delta SubSea

Suction Cup Sticky Foot

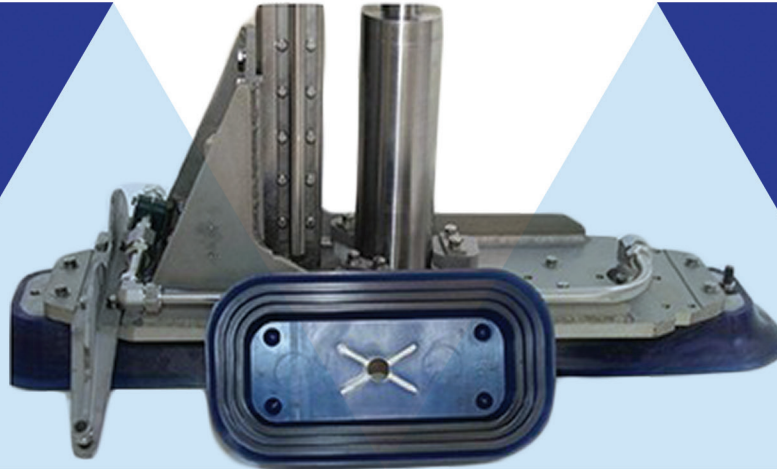

The sticky foot is used to assist the ROV in station holding and lifting of smooth surfaced objects. It can be manipulator deployed or hard mounted to the vehicle in a convenient spot for the work at hand.

Specifications

Weight:

- ▲ 45lbs in air
- ▲ 38lbs in water

Size:

- ▲ 12" x 12" 20"

Hydraulic input requirements:

- ▲ 9gpm @ 2,000psi

Hydraulic output requirements:

- ▲ 250gpm

Suction cup bellows:

- ▲ Variety of sizes available

Materials:

- ▲ 6061 T-6 Aluminum
- ▲ 316 SS
- ▲ Ampco 45 Ni-Al-Brz
- ▲ Carbon Steel (motor)
- ▲ Rubber

Working Depth:

- ▲ 10,000fsw

