


Delta SubSea

Zero Leak Hot Stab

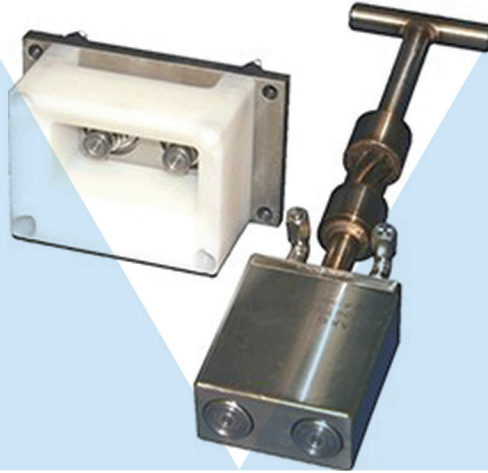

Delta SubSea is pleased to offer a Zero Leak Hot Stab. In an effort to show environmental responsibility several major operators have requested the Zero Leak Hot Stab which allows them to comply with their “no spill” policies when using ROV’s. Traditional hot stabs often leak small amounts of oil into the environment when removed sub-sea and also increase the potential to contaminate the ROV’s hydraulic system with seawater which can and will destroy sensitive hydraulic equipment over time. The Zero Leak Hot Stab has been designed with a flush faced seal connection which eliminates the possibility for a spill and at the same time protects the ROV’s hydraulics system. This simple, rugged and reliable design makes the Zero Leak Hot Stab a robust ROV friendly interface while eliminating unnecessary spills in the field.

Specifications

Interface:

- ▲ Male stab assembly two (2) 1/4”
- ▲ Male JIC hydraulic fluid ports

Maximum connection pressure:

- ▲ 363psi

Maximum operating pressure:

- ▲ 3,000psi

Approx. Insert & Removal Force:

- ▲ 60lbs

Weights:

- ▲ Hot Stab - in air 10lbs / in water 9lbs
- ▲ Manifold - in air 6lbs / in water 5lbs

Materials:

- ▲ 316 SS
- ▲ UHMW

Delta SubSea

DeltaSubSea-ROV.com

1.936.582.7237

*Delta SubSea is not the manufacturer of this product.